



Horizontal Articulated Robot

LPH series

DENSO

**High-performance,
low-priced,
compact and light weight
SCARA Robot!**





Maximum arm reach	400mm
Maximum payload	3kg
Position repeatability	$\pm 0.02\text{mm}$
Mounting orientation	Floor

Features

Gripper Design with High Degree of Freedom



The maximum moment of inertia of the T-axis is large in order to provide a gripper design with a high degree of freedom.

* Also supports use in other configurations including in an overhanging position.

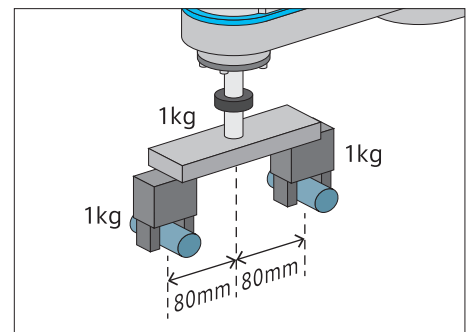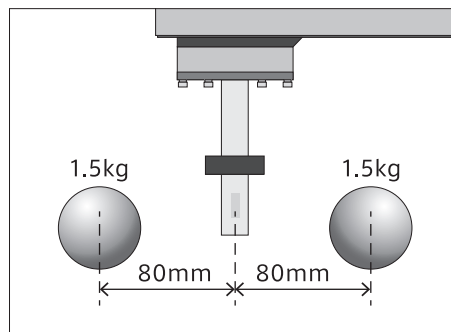

Reduction in Work Time without the Use of PLC

The robot and surrounding equipment can be controlled together according to the purpose through use of the high-performance controller RC8 function. This feature realizes a total cost down for equipment.

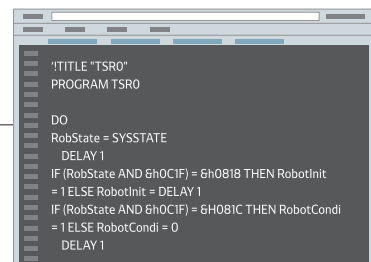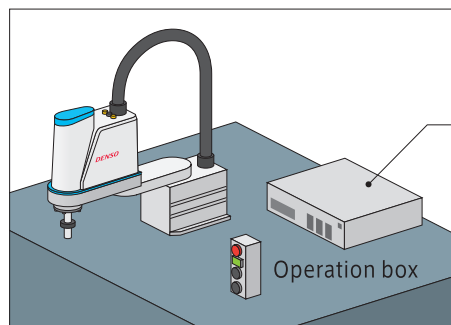



Privilege Task Function

Enables Control from PLC with No Programming Knowledge Required


Utilizing the command-slave function provided as a free option enables the direct control of the robot from PLC through the Function Block (FB) feature that supports 107 types of robot commands that can be openly programmed from PLC.

This feature allows adjustments to be performed with only PLC knowledge without needing to create programs on the robot side, to realize a reduction in work time for initial adjustments at the start of use.

LPH040

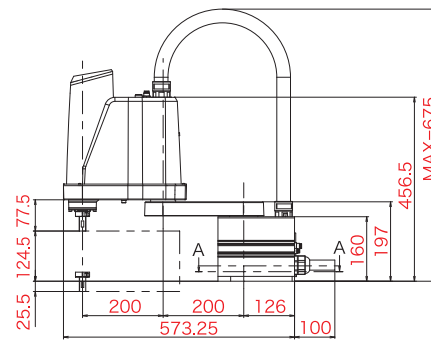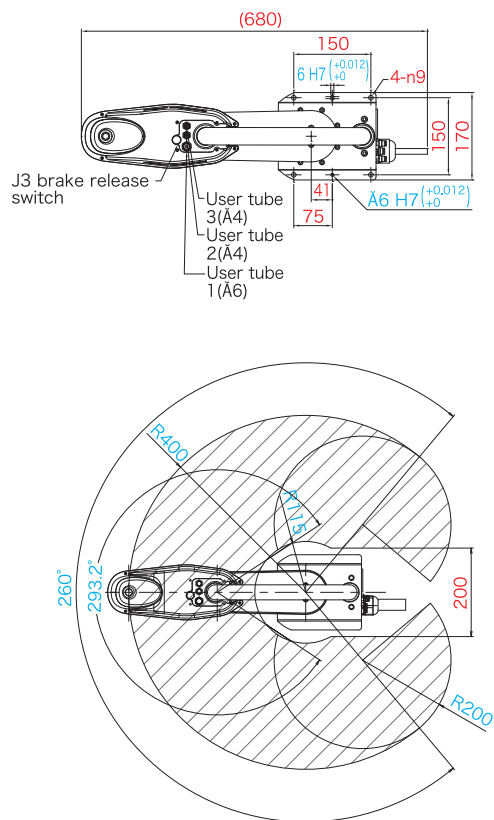

■ Detailed drawing of
End-effector mounting face



Specifications

Term		Specifications
Model name of robot unit		LPH-040A1
Overall arm length(first arm + second arm)		200+200=400mm
Motion angle and stroke	J1(1st-Axis)	±130°
	J2(2nd-Axis)	±146.6°
	Z(3rd-Axis)	150mm
	T(4th-Axis)	±360°
Axis combination		J1(1st-Axis)+J2(2nd-Axis)+Z(3rd-Axis)+T(4th-Axis)
Maximum payload		3kg
Cycle time (*2)		0.45sec
Maximum composite speed (at the center of an end-effector mounting face)	At the center of the hand mounting flange	4710mm/sec
	Z	1250mm/sec
	T	1875deg/sec
Position repeatability (at the center of an end-effector mounting face) (*3)	J1+J2	±0.02mm
	Z	0.02mm
	T	±0.01°
Maximum force-fit (downward, for up to 1 sec)		90N
Maximum allowable moment of inertia		0.075kgm ²
Position detection		Absolute encoder
Drive motor and brake		AC servomotors for all joints / Brakes for Z axis
User air pipe		3 systems (φ4×2, φ6×1)
User signal line		15 (for proximity sensor signals, etc.)
Air source	Operating pressure	0.05~0.35MPa
	Max. allowable pressure	0.6MPa
Weight		Approx. 16kg

*1 : This product cannot be sold in some countries.

*2 : Time required for a robot to move a 2kg payload between two points 300 mm apart at a height of 25mm.

*3 : Position repeatability is the precision at constant ambient temperature.

DENSO
DENSO WAVE

Please visit our website for more
information on products and functions.
<https://www.denso-wave.com/>



Official DENSO WAVE Channel:
Provides explanatory videos of functions,
case studies, and robot applications.



DENSO Products and Services Americas, Inc.
3900 Via Oro Avenue, Long Beach, California, 90810, U.S.A.
Phone : +1-888-476-2689 FAX : +1-310-952-7502

DENSO KOREA CORPORATION
131, Seonggogae-ro, Uiwang-si, Gyeonggi-do, Korea 437-120
Phone : +82-31-340-1783 FAX : +82-31-8033-7213

DENSO TAIWAN CORP.
No.525 Sec.2, Mei Su Road, Jui Ping Li, Yang-Mei Town, Taoyuan Hsien, Taiwan
Phone : +886 3-482-8001 FAX : +886 3-482-8003

DENSO EUROPE B. V. DENSO Robotics Europe
Waldeckerstrasse 9 D-64546 Moerfelden-Walldorf, Germany
Phone : +49-6105-27-35-150 FAX : +49-6105-27-35-180

DENSO (CHINA) INVESTMENT CO., LTD.
No.35 Yuandian Road, Minhang District, Shanghai, CHINA 201108
Phone : +86-21-2350-0093 FAX : +86-21-2350-0179

DENSO SALES (THAILAND) CO., LTD.
888 Moo 1, Bangna-Trad Rd. Km 27.5, T.Bangbor, A.Bangbor, Samutprakarn, 10560, Thailand
Phone : +66-2-315-9500 FAX : +66-2-315-9556

You can see
product information
from here.

